

Use the PV dedicated function for accurate, safe measurements in 4 seconds



Measurement not affected by generating PV

The IR4053, which was designed for PV, can accurately measure insulation resistance without being affected by the generating PV.



Accurate and safe measurement without creating shorts

Normally, to accurately measure the insulation resistance of a generating PV, one needs to short the measured circuit. That's not necessary with the IR4053. (Left figure: Short-circuit switch)



Displays measurement in 4 seconds

The IR4053 displays the measured value just 4 seconds after starting measurement. After the first display, the displayed value is updated each second. Comfortably carry out swift measurements.



With voltage measurement range



With normal insulation resistance range



Turn off the isolator

Be sure to turn the isolator and the output switch off before measurement.

*If there is a surge absorber attached to the output switch input section, remove it prior to testing.



Check the open voltage and polarity

Place probes on P (+) and N (-) terminals to check the open voltage and polarity.

If the polarity is incorrect, the display will light up in red. You can also perform open voltage tests of PV systems that support 1000 V.



Measure between P (+) and the earth

Once you check the polarity, be sure to measure the insulation resistance between P (+) and the earth first. If there is a problem in the measurement value, do not measure between N (-) and the earth. Proceed to STEP 5 and measure between the earth and P again.

*Apply output voltage that matches the PV to be measured.

Flow of Measurement

First, Pre-measurement Checks

Check for Problems in a Second Easy Inspection

Specifications

Accuracy guaranteed for 1 year.
Accuracy guarantee for temperature and humidity: 23°C±5°C (73°F±9°F) and 90% rh or lower

Insulation resistance measurement

Output voltage (DC)	50 V	125 V	250 V	500 V	1000 V
Effective maximum indicated value	100 MΩ	250 MΩ	500 MΩ	2000 MΩ	4000 MΩ
1st effective measuring range [MΩ]	0.200 to 10.00	0.200 to 25.0	0.200 to 50.0	0.200 to 500	0.200 to 1000
Accuracy	±4% rdg.				
2nd effective measuring range [MΩ]	10.1 to 100.0	25.1 to 250	50.1 to 500	501 to 2000	1010 to 4000
Accuracy	±8% rdg.				
Other measuring range [MΩ]	0 to 0.199				
Accuracy	±2% rdg. ±6 dgt.				
Lower limit resistance value to maintain nominal output voltage	0.05 MΩ	0.125 MΩ	0.25 MΩ	0.5 MΩ	1 MΩ

Voltage measurement

Range	4.2 V	42 V	420 V	1000 V
DC V	4.200 V	42.00 V	420.0 V	1100 V
Accuracy	±1.3% rdg. ±4 dgt. (Ranges in excess of 1000 V are not guaranteed for accuracy.)			
Range	420 V	600 V		
AC V	420.0 V	750 V		
Accuracy	±2.3% rdg. ±8 dgt. (Ranges in excess of 600 V are not guaranteed for accuracy.)			

PVΩ measurement

Output voltage (DC)	500 V	1000 V		
Maximum indicated value	2000 MΩ	4000 MΩ		
Measurement range [MΩ]	0.200 to 500	501 to 2000	0.200 to 1000	1010 to 4000
Accuracy	±4% rdg.	±8% rdg.	±4% rdg.	±8% rdg.
Other measuring range [MΩ]	0 to 0.199			
Accuracy	±2% rdg. ±6 dgt.			

Functions

Backlight	YES
Drop proof	On concrete: 1 m (3.28 ft)
Battery power indicator	YES
Auto power save	Turns off after approx. 10 minutes
Live circuit indicator	YES
Automatic electric discharge	YES
Comparator	YES
Automatic DC/AC detection	YES

Basic specifications

Operating temperature and humidity	0°C to 40°C (32 to 104°F), 90% rh or lower (non-condensing)
Storage temperature and humidity	-10°C to 50°C (14 to 122°F), 90% rh or lower (non-condensing)
Maximum rated voltage to earth	600 V AC/DC, Measurement category III, Anticipated transient overvoltage: 6000 V
Dielectric strength	7060 V AC, 50/60 Hz, Measurement terminals - electrical enclosure, 1 min
Degree of protection	IP40 (EN60529)
Standards	JIS C1302 (Insulation resistance measurement), EN61326 (EMC), EN61557-1/-2

Power supply

Power supply type	AA alkaline batteries (LR6) ×4
Continuous operating time	Approx. 20 hours

Dimensions and mass

Dimensions	159W × 177H × 53D mm (6.26"W × 6.97"H × 2.09"D)
Mass	Approx. 600 g (21.2 oz) (including batteries, excluding test lead)

Model : INSULATION TESTER IR4053

Model No. (Order Code) (Note)

IR4053-10 (Bundled Test lead L9787)



TEST LEAD L9787

[Other Accessories] Neck strap ×1, Instruction manual ×1
AA alkaline batteries (LR6) ×4

options




TEST LEAD SET WITH REMOTE SWITCH L9788-11

Bundled with Remote switch type test lead L9788-10/ Earth lead, alligator clip, 1.2 m (3.94 ft) length

L9787 options


For checking breaker terminals
Attach to the L9787's red probe tip



BREAKER PIN L9787-91

L9788-11 options

For checking breaker terminals
Attach to the L9788-10's red probe tip

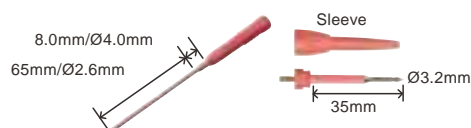

BREAKER PIN L9788-92

TIP PIN L9788-90

Shared options

Attaches to tip of the earth lead;
11 mm diameter.



MAGNETIC ADAPTER 9804-02

Note: Company names and product names appearing in this brochure are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi,
Ueda, Nagano 386-1192 Japan
<https://www.hioki.com/>



Scan for all regional contact information

DISTRIBUTED BY